



T8 D SHAPED SHACKLE //

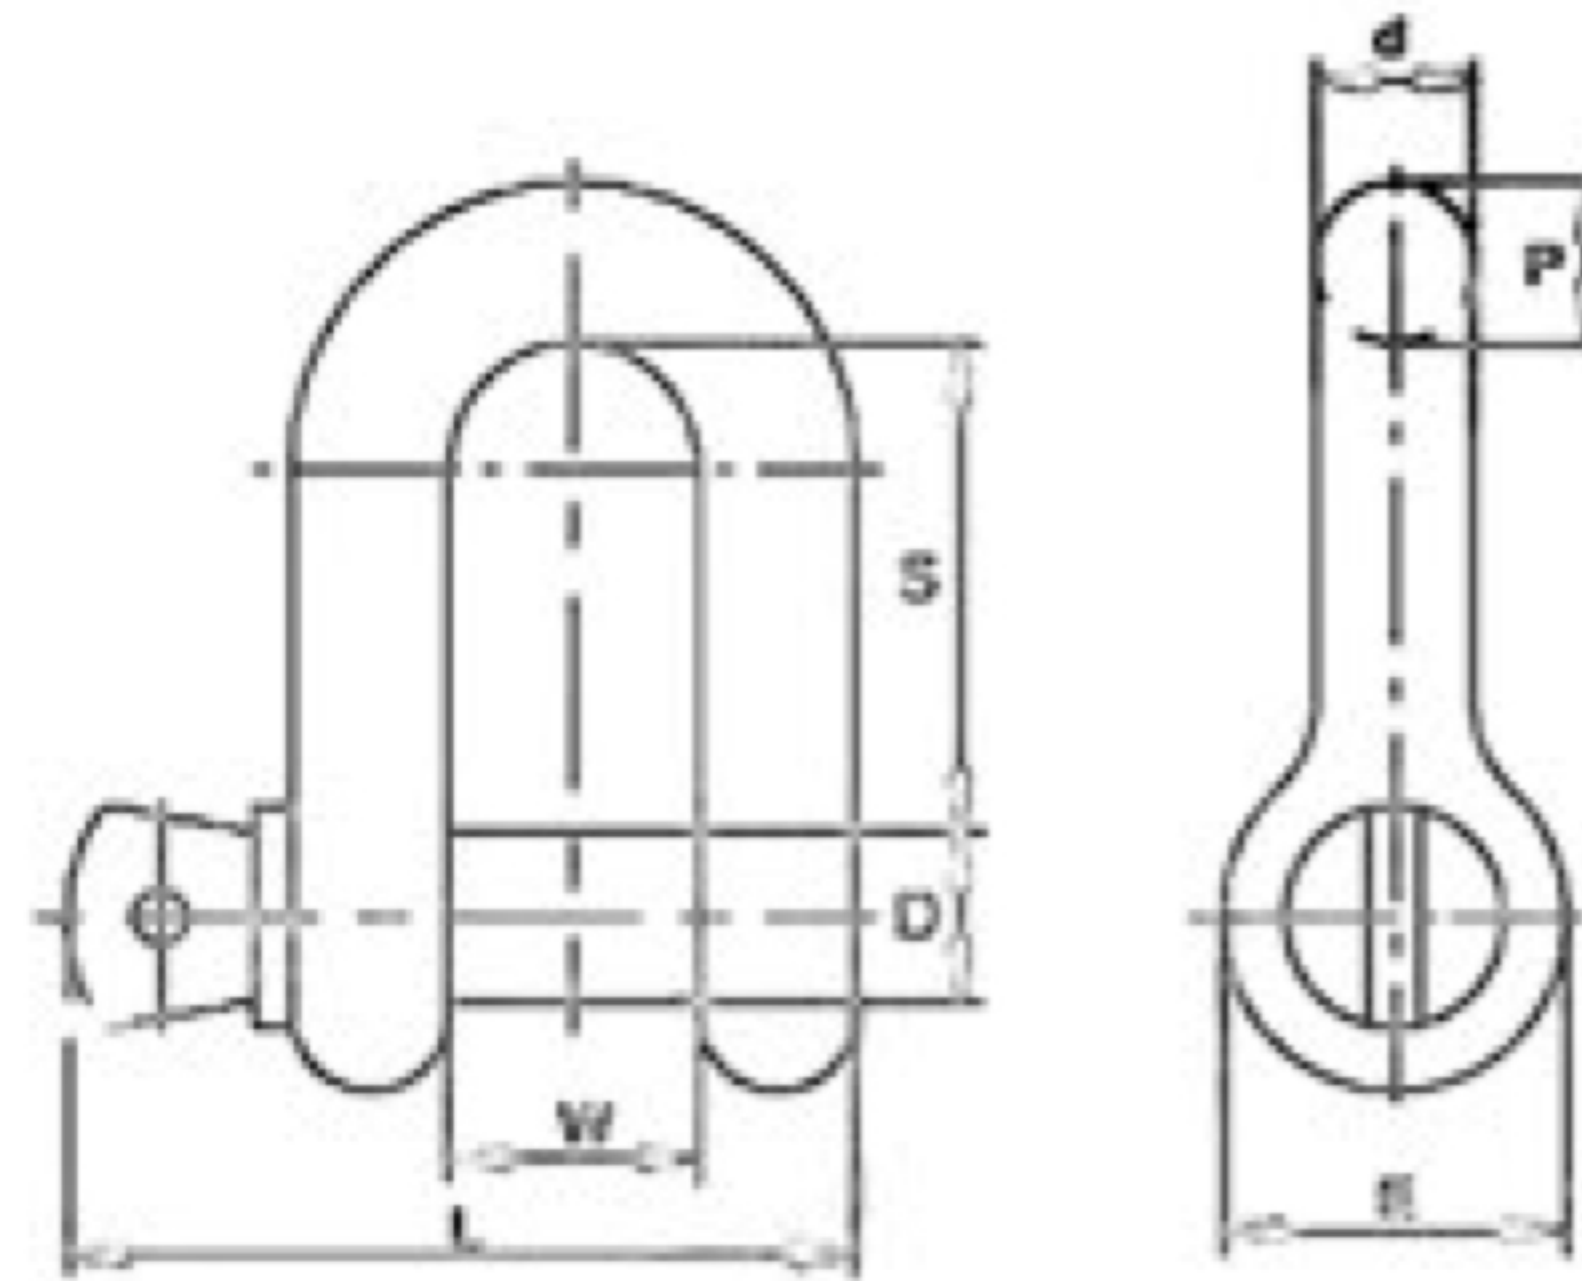


Model	WLL(t)	W(mm)	D(mm)	d(mm)	E(mm)	P(mm)	S(mm)	L(DW)(mm)	Self weight(DW)(Kg)
T-DW2-3/8	2	17	12	9.5	23	9.5	32	52.5	0.13
T-DW2.5-7/16	2.5	19	14	11	27	11	36.5	62	0.2
T-DW3.25-1/2	3.25	20.5	16	13	30	13	41.5	70.5	0.27
T-DW5-5/8	5	27	20	16	38	16	51	88	0.57
T-DW7-3/4	7	32	22	19	46	20.5	60.5	102.5	0.99
T-DW9.5-7/8	9.5	36.5	27	22.5	53	24.5	71.5	121	1.57
T-DW12.5-1	12.5	43	30	25.5	60.5	25.5	81	139	2.3
T-DW15-1 1/8	15	46	33	29	68.5	32	91	153	3.42
T-DW18-1 1/4	18	51.5	36	32	76	35	100	168.5	4.48
T-DW21-1 3/8	21	57	39	35	84	38	111	184.5	6.46
T-DW30-1 1/2	30	60.5	42	38	92	41	122	199	7.65
T-DW40-1 3/4	40	73	52	44.5	106.5	54	146	244	12.48
T-DW50-2	50	82.5	60	51	122	51	171.5	275	18.63
T-DW80-2 1/2	80	105	72	66.5	144.5	66.5	203	346	36.02

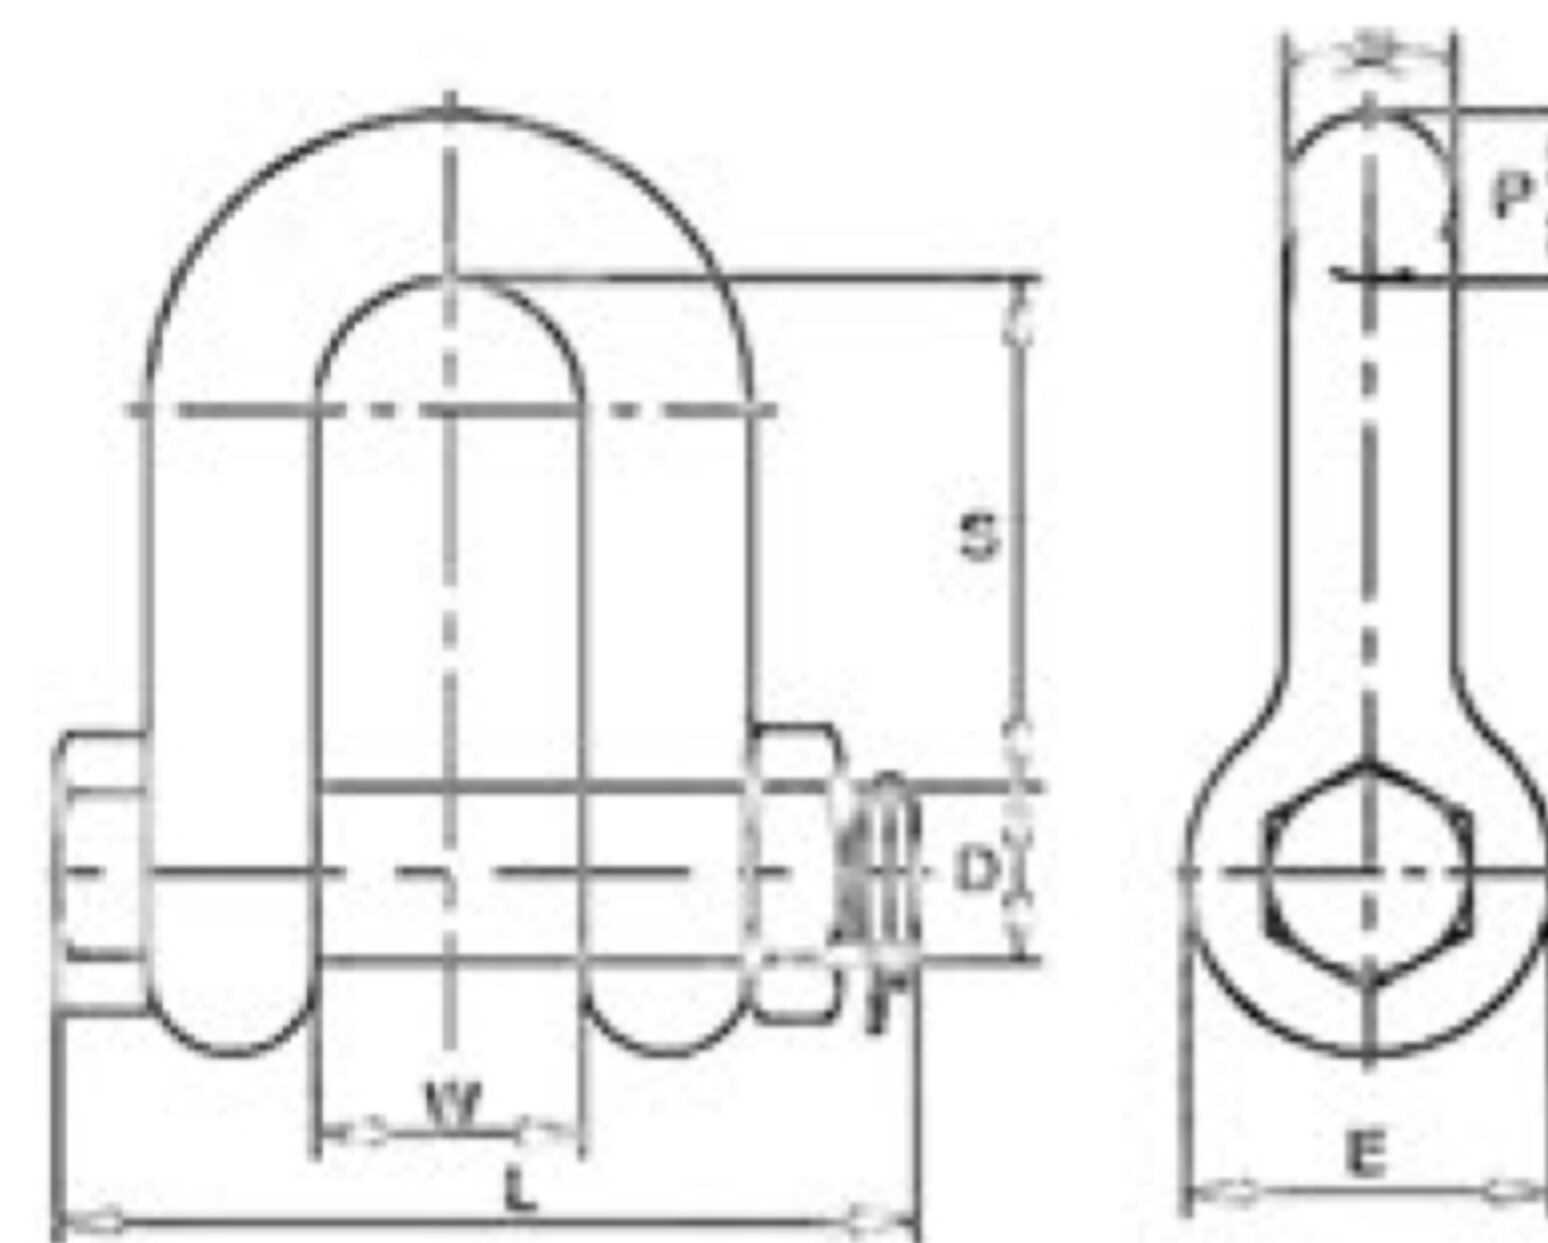


Model	WLL(t)	W(mm)	D(mm)	d(mm)	E(mm)	P(mm)	S(mm)	L(DX)(mm)	Self weight(DX)(Kg)
T-DX2-3/8	2	17	12	9.5	23	9.5	32	54	0.13
T-DX2.5-7/16	2.5	19	14	11	27	11	36.5	62	0.21
T-DX3.25-1/2	3.25	20.5	16	13	30	13	41.5	71.5	0.28
T-DX5-5/8	5	27	20	16	38	16	51	89	0.6
T-DX7-3/4	7	32	22	19	46	20.5	60.5	105	1.04
T-DX9.5-7/8	9.5	36.5	27	22.5	53	24.5	71.5	121	1.63
T-DX12.5-1	12.5	43	30	25.5	60.5	25.5	81	136.5	2.38
T-DX15-1 1/8	15	46	33	29	68.5	32	91	149.5	3.59
T-DX18-1 1/4	18	51.5	36	32	76	35	100	164.5	4.65
T-DX21-1 3/8	21	57	39	35	84	38	111	179	6.71
T-DX30-1 1/2	30	60.5	42	38	92	41	122	194.5	8.05
T-DX40-1 3/4	40	73	52	44.5	106.5	54	146	239	13.18
T-DX50-2	50	82.5	60	51	122	51	171.5	269	19.3
T-DX80-2 1/2	80	105	72	66.5	144.5	66.5	203	344	37.22
T-DX110-3	110	127	85	76	165	89	216	401	65.3

S6 CLASS BOW SHACKLE

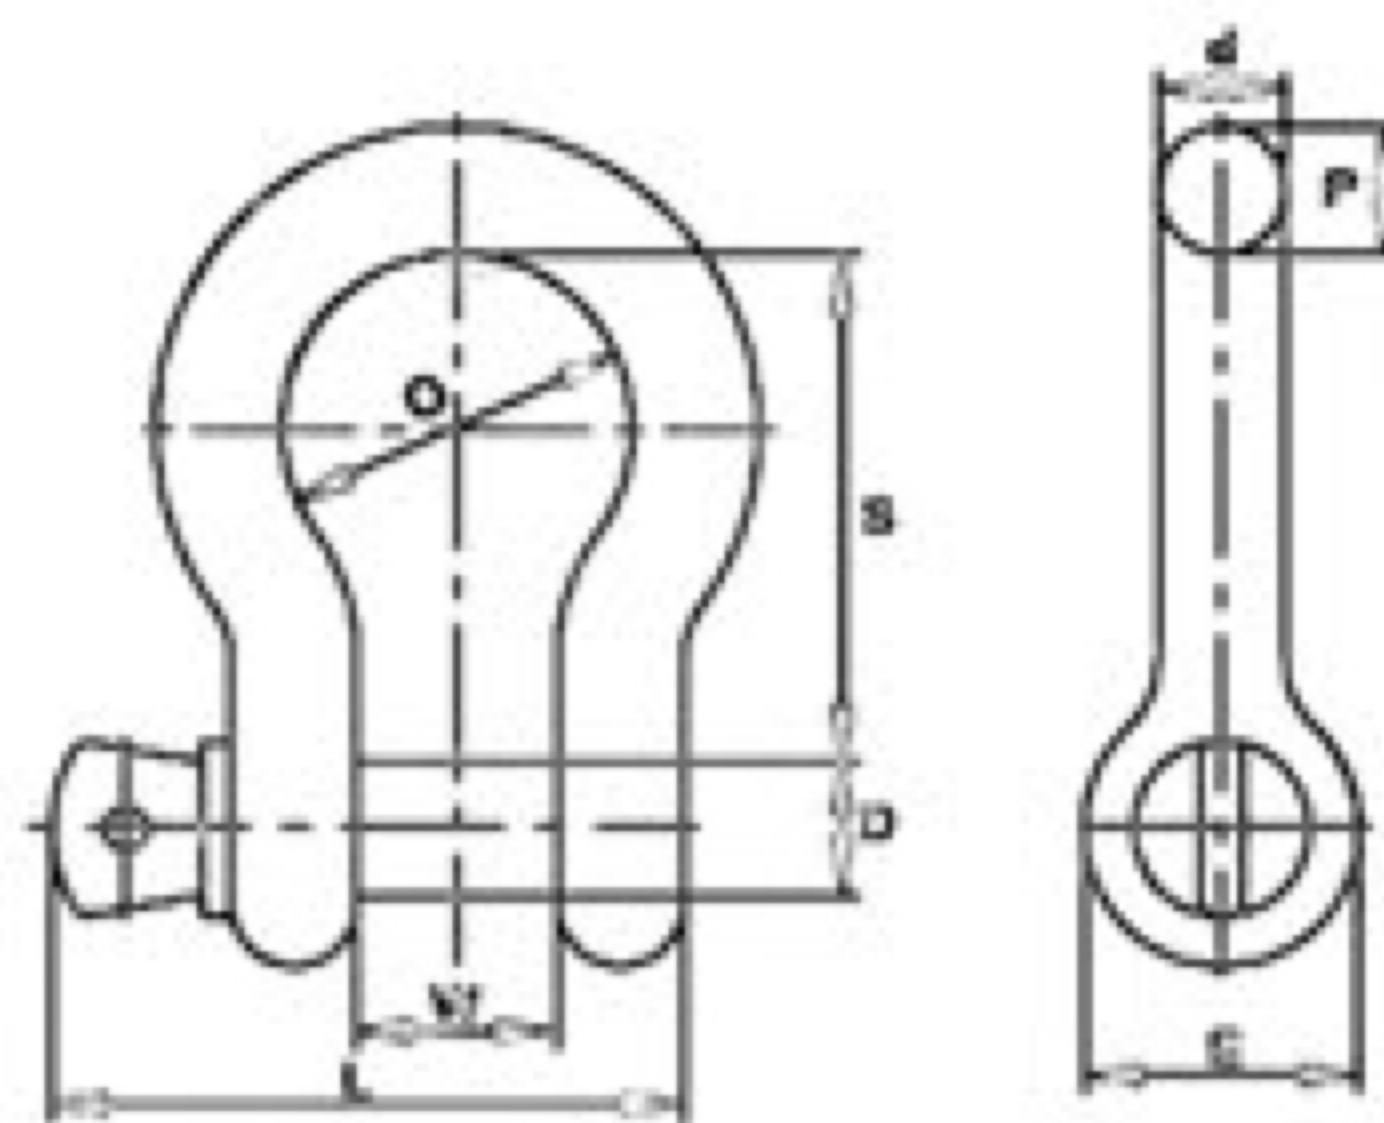


Model	WLL(t)	W(mm)	D (mm)	d (mm)	E (mm)	P (mm)	S (mm)	O (mm)	L(BW)(mm)	Self weight (BW)Kg
S-BW0.5-1/4	0.5	12	8	6.5	15.5	6.5	29	20	36.5	0.05
S-BW0.75-5/16	0.75	13.5	10	8	19	8	31	21.5	44.5	0.1
S-BW1-3/8	1	17	12	9.5	23	9.5	36.5	26	52.5	0.13
S-BW1.5-7/16	1.5	19	14	11	27	11	43	29.5	62	0.21
S-BW2-1/2	2	20.5	16	13	30	13	48	33	70.5	0.3
S-BW3.25-5/8	3.25	27	20	16	38	17.5	60.5	43	88	0.64
S-BW4.75-3/4	4.75	32	22	19	46	20.5	71.5	51	102.5	1.09
S-BW6.5-7/8	6.5	36.5	27	22.5	53	24.5	84	58	121	1.7
S-BW8.5-1	8.5	43	30	25.5	60.5	27	95	68.5	139	2.5
S-BW9.5-1 1/8	9.5	46	33	29.5	68.5	32	108	74	154	3.79
S-BW12-1 1/4	12	51.5	36	33	76	35	119	82.5	170.5	4.89
S-BW13.5-1 3/8	13.5	57	39	36	84	38	133.5	92	186.5	7.04
S-BW17-1 1/2	17	60.5	42	39	92	41	146	98.5	201	8.35
S-BW25-1 3/4	25	73	52	47	106.5	57	178	127	244	13.72
S-BW35-2	35	82.5	60	53	122	61	197	146	275	20.33
S-BW55-2 1/2	55	105	72	69	144.5	79.5	267	184	346	40.92

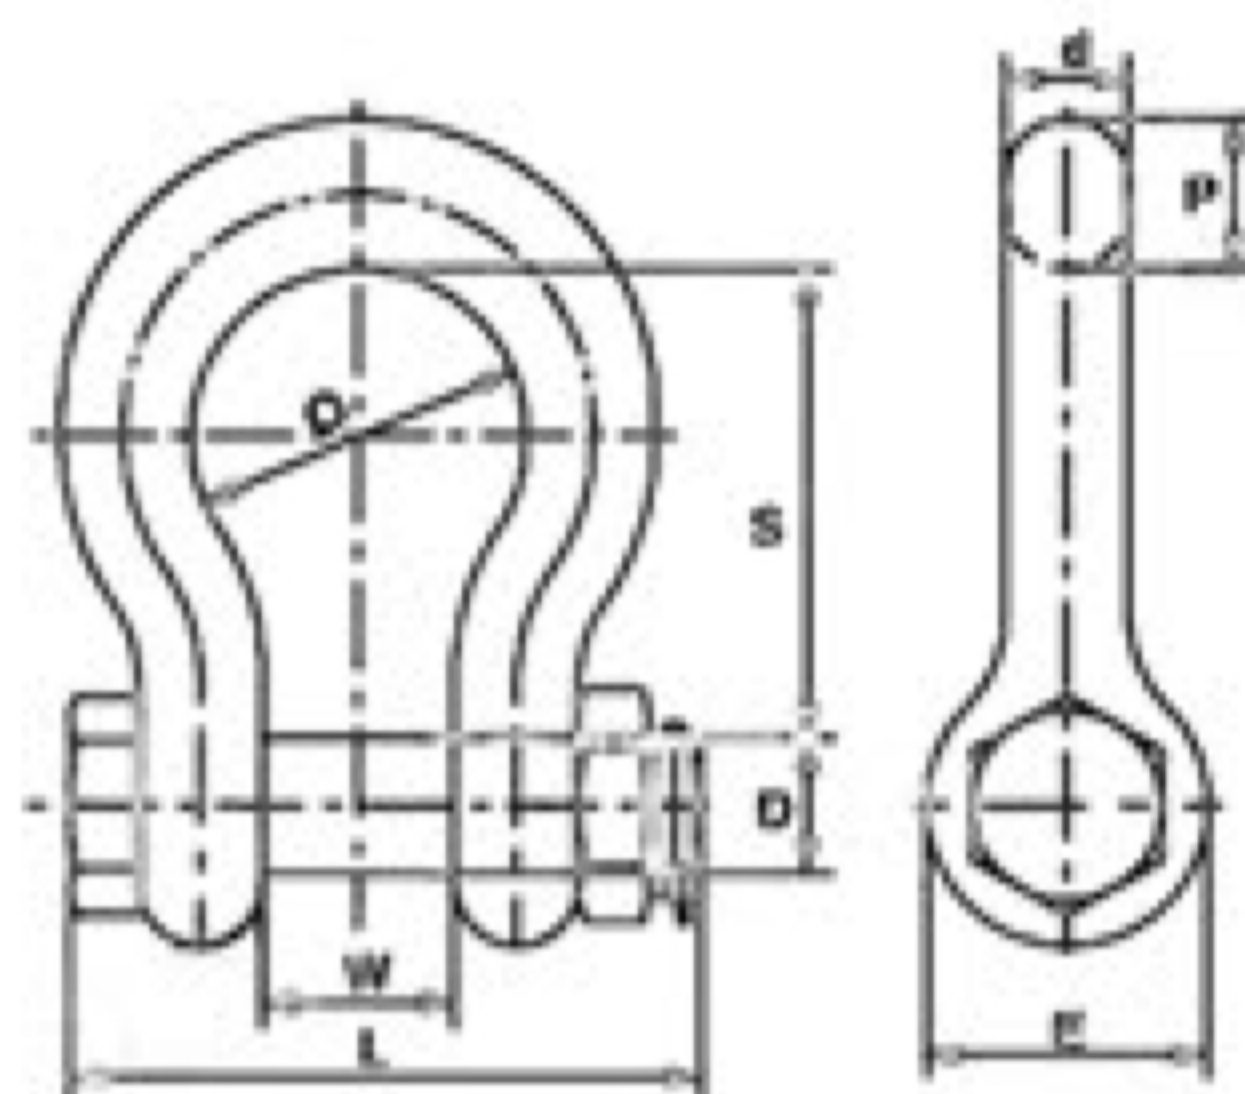


Model	WLL(t)	W (mm)	D (mm)	d (mm)	E (mm)	P (mm)	S (mm)	O(mm)	BX(mm)	Self weight(BX)Kg
S-BX0.5-1/4	0.5	12	8	6.5	15.5	6.5	29	20	37	0.05
S-BX0.75-5/16	0.75	13.5	10	8	19	8	31	21.5	45	0.1
S-Bx1-3/8	1	17	12	9.5	23	9.5	36.5	26	54	0.13
S-BX1.5-7/16	1.5	19	14	11	27	11	43	29.5	62	0.22
S-Bx2-1/2	2	20.5	16	13	30	13	48	33	71.5	0.31
S-BX3.25-5/8	3.25	27	20	16	38	17.5	60.5	43	89	0.67
S-Bx4.75-3/4	4.75	32	22	19	46	20.5	71.5	51	105	1.14
S-BX6.5-7/8	6.5	36.5	27	22.5	53	24.5	84	58	121	1.76
S-BX8.5-1	8.5	43	30	25.5	60.5	27	95	68.5	136.5	2.58
S-BX9.5-1 1/8	9.5	46	33	29.5	68.5	32	108	74	149.5	3.96
S-Bx12-1 1/4	12	51.5	36	33	76	35	119	82.5	164.5	5.06
S-BX13.5-1 3/8	13.5	57	39	36	84	38	133.5	92	179	7.29
S-BX17-1 1/2	17	60.5	42	39	92	41	146	98.5	194.5	8.75
S-BX25-1 3/4	25	73	52	47	106.5	57	178	127	239	14.22
S-BX35-2	35	82.5	60	53	122	61	197	146	269	21
S-BX55-2 1/2	55	105	72	69	144.5	79.5	267	184	344	42.12
S-BX85-3	85	127	85	76	165	92	330	200	401	74.8
S-Bx120-3 1/2	120	133.5	95	92	203	104.5	371.5	228.5	450	123.6
S-BX150-4	150	140	110	104	228.5	116	368	254	500	165.9

S6 D SHAPED SHACKLE //

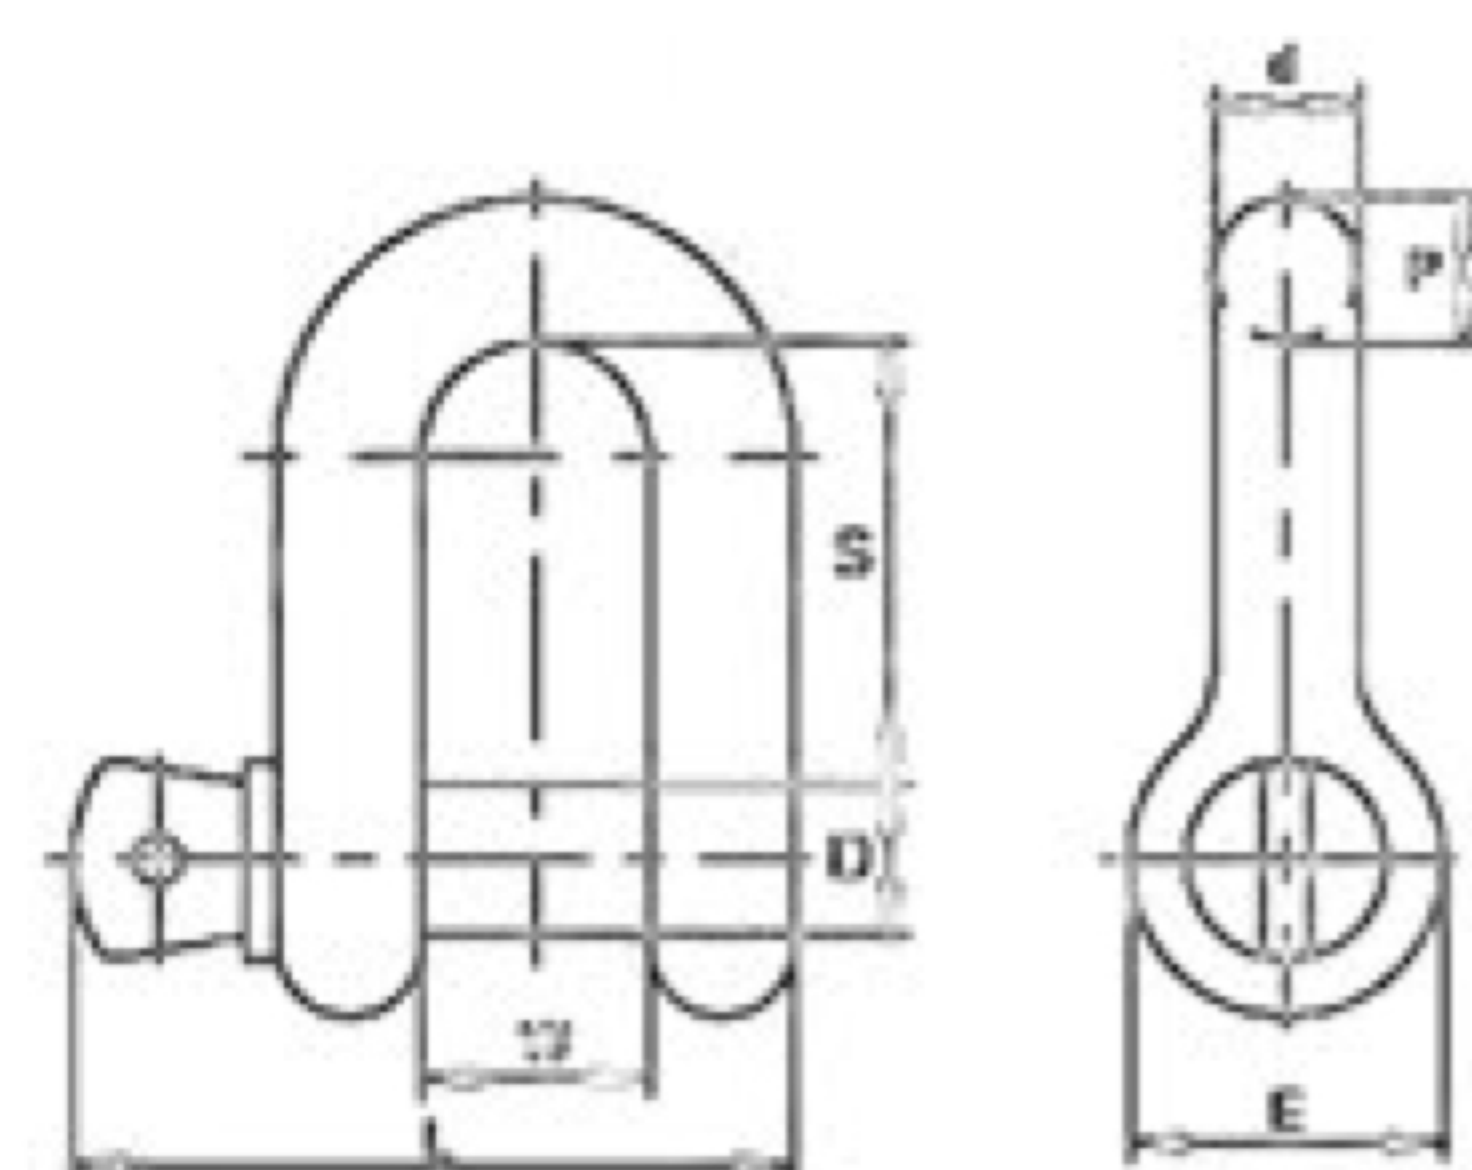


Model	WLL(t)	W (mm)	D (mm)	d (mm)	E (mm)	P (mm)	S (mm)	(DW)(mm)	Self weight (DW)Kg
S-DW0.5-1/4	0.5	12	8	6.5	15.5	6.5	22	36.5	0.04
S-DW0.75-5/16	0.75	13.5	10	8	19	8	26	44.5	0.08
S-DW1-3/8	1	17	12	9.5	23	9.5	32	52.5	0.13
S-DW1.5-7/16	1.5	19	14	11	27	11	36.5	62	0.2
S-DW2-1/2	2	20.5	16	13	30	13	41.5	70.5	0.27
S-DW3.25-5/8	3.25	27	20	16	38	16	51	88	0.57
S-DW4.75-3/4	4.75	32	22	19	46	20.5	60.5	102.5	0.99
S-DW6.5-7/8	6.5	36.5	27	22.5	53	24.5	71.5	121	1.57
S-DW8.5-1	8.5	43	30	25.5	60.5	25.5	81	139	2.3
S-DW9.5-11/8	9.5	46	33	29	68.5	32	91	153	3.42
S-DW12-11/4	12	51.5	36	32	76	35	100	168.5	4.48
S-DW13.5-1 3/8	13.5	57	39	35	84	38	111	184.5	6.46
S-DW17-11/2	17	60.5	42	38	92	41	122	199	7.65
S-DW25-1 3/4	25	73	52	44.5	106.5	54	146	244	12.48
S-DW35-2	35	82.5	60	51	122	51	171.5	275	18.63
S-DW55-2 1/2	55	105	72	66.5	144.5	66.5	203	346	36.02

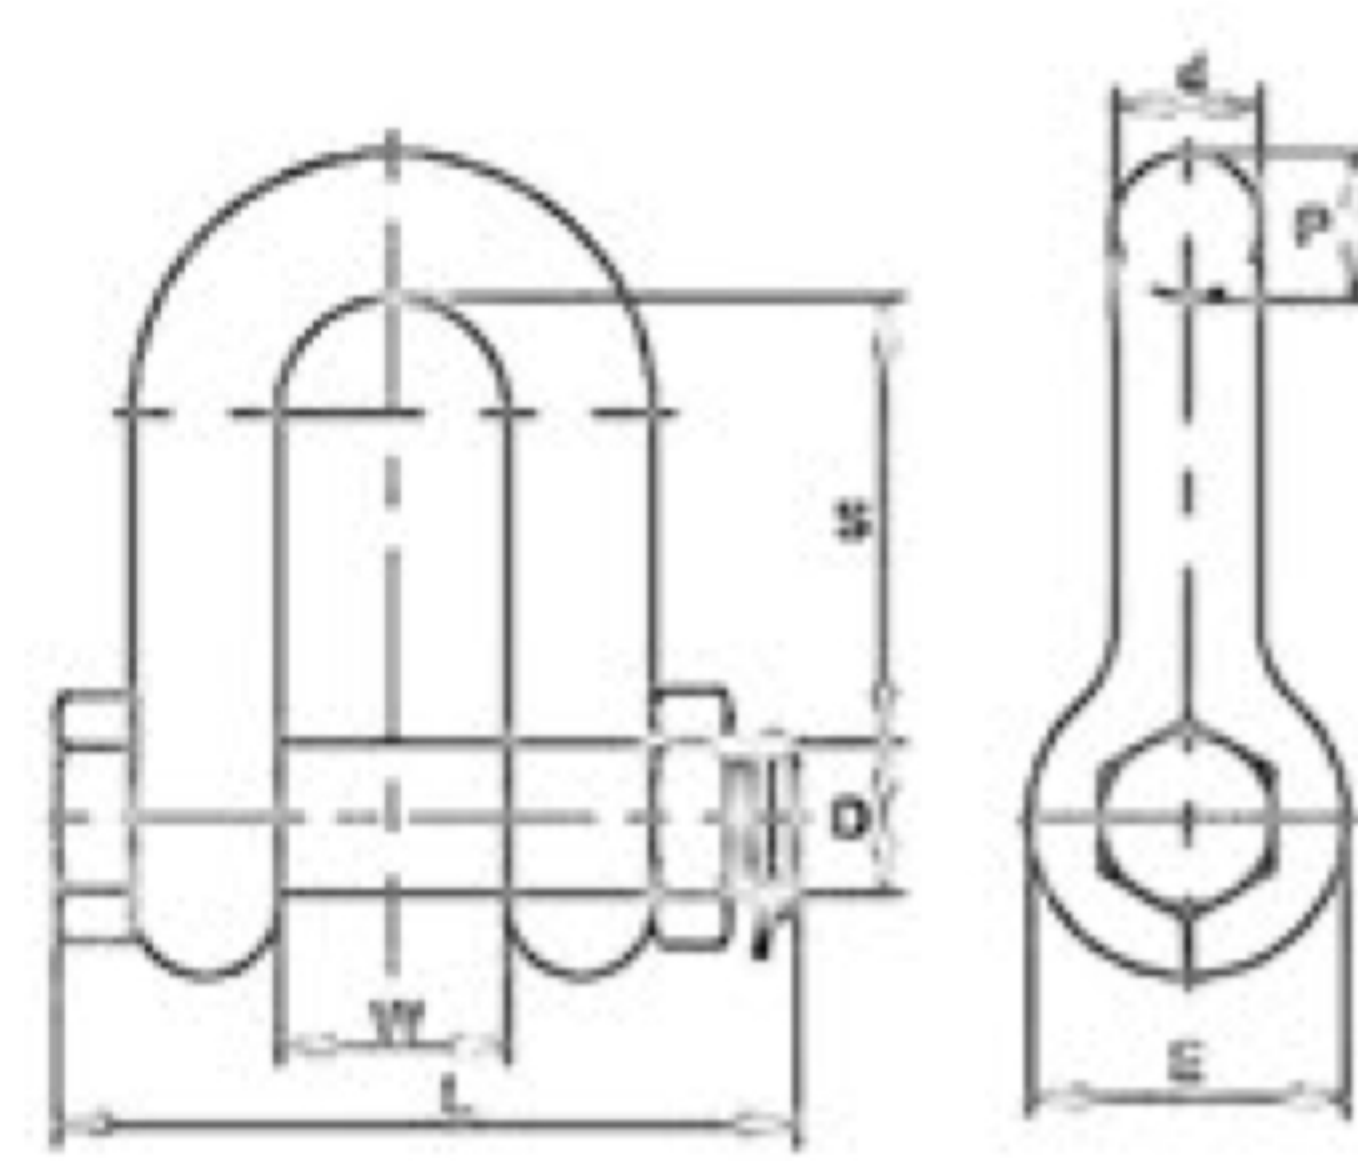


Model	WLL(t)	W(mm)	D(mm)	d(mm)	E(mm)	P(mm)	S(mm)	(DX)mm	Self weight (DX)Kg
S-DX0.5-1/4	0.5	12	8	6.5	15.5	6.5	22	37	0.06
S-DX0.75-5/16	0.75	13.5	10	8	19	8	26	45	0.1
S-DX1-3/8	1	17	12	9.5	23	9.5	32	54	0.13
S-DX1.5-7/16	1.5	19	14	11	27	11	36.5	62	0.21
S-DX2-1/2	2	20.5	16	13	30	13	41.5	71.5	0.28
S-DX3.25-5/8	3.25	27	20	16	38	16	51	89	0.6
S-DX4.75-3/4	4.75	32	22	19	46	20.5	60.5	105	1.04
S-DX6.5-7/8	6.5	36.5	27	22.5	53	24.5	71.5	121	1.63
S-DX8.5-1	8.5	43	30	25.5	60.5	25.5	81	136.5	2.38
S-DX9.5-1 1/8	9.5	46	33	29	68.5	32	91	149.5	3.59
S-DX12-1 1/4	12	51.5	36	32	76	35	100	164.5	4.65
S-DX13.5-1 3/8	13.5	57	39	35	84	38	111	179	6.71
S-DX17-1 1/2	17	60.5	42	38	92	41	122	194.5	8.05
S-DX25-1 3/4	25	73	52	44.5	106.5	54	146	239	13.18
S-DX35-2	35	82.5	60	51	122	51	171.5	269	19.3
S-DX55-2 1/2	55	105	72	66.5	144.5	66.5	203	344	37.22
S-DX85-3	85	127	85	76	165	89	216	401	65.3

T8 CLASS BOW SHACKLE //

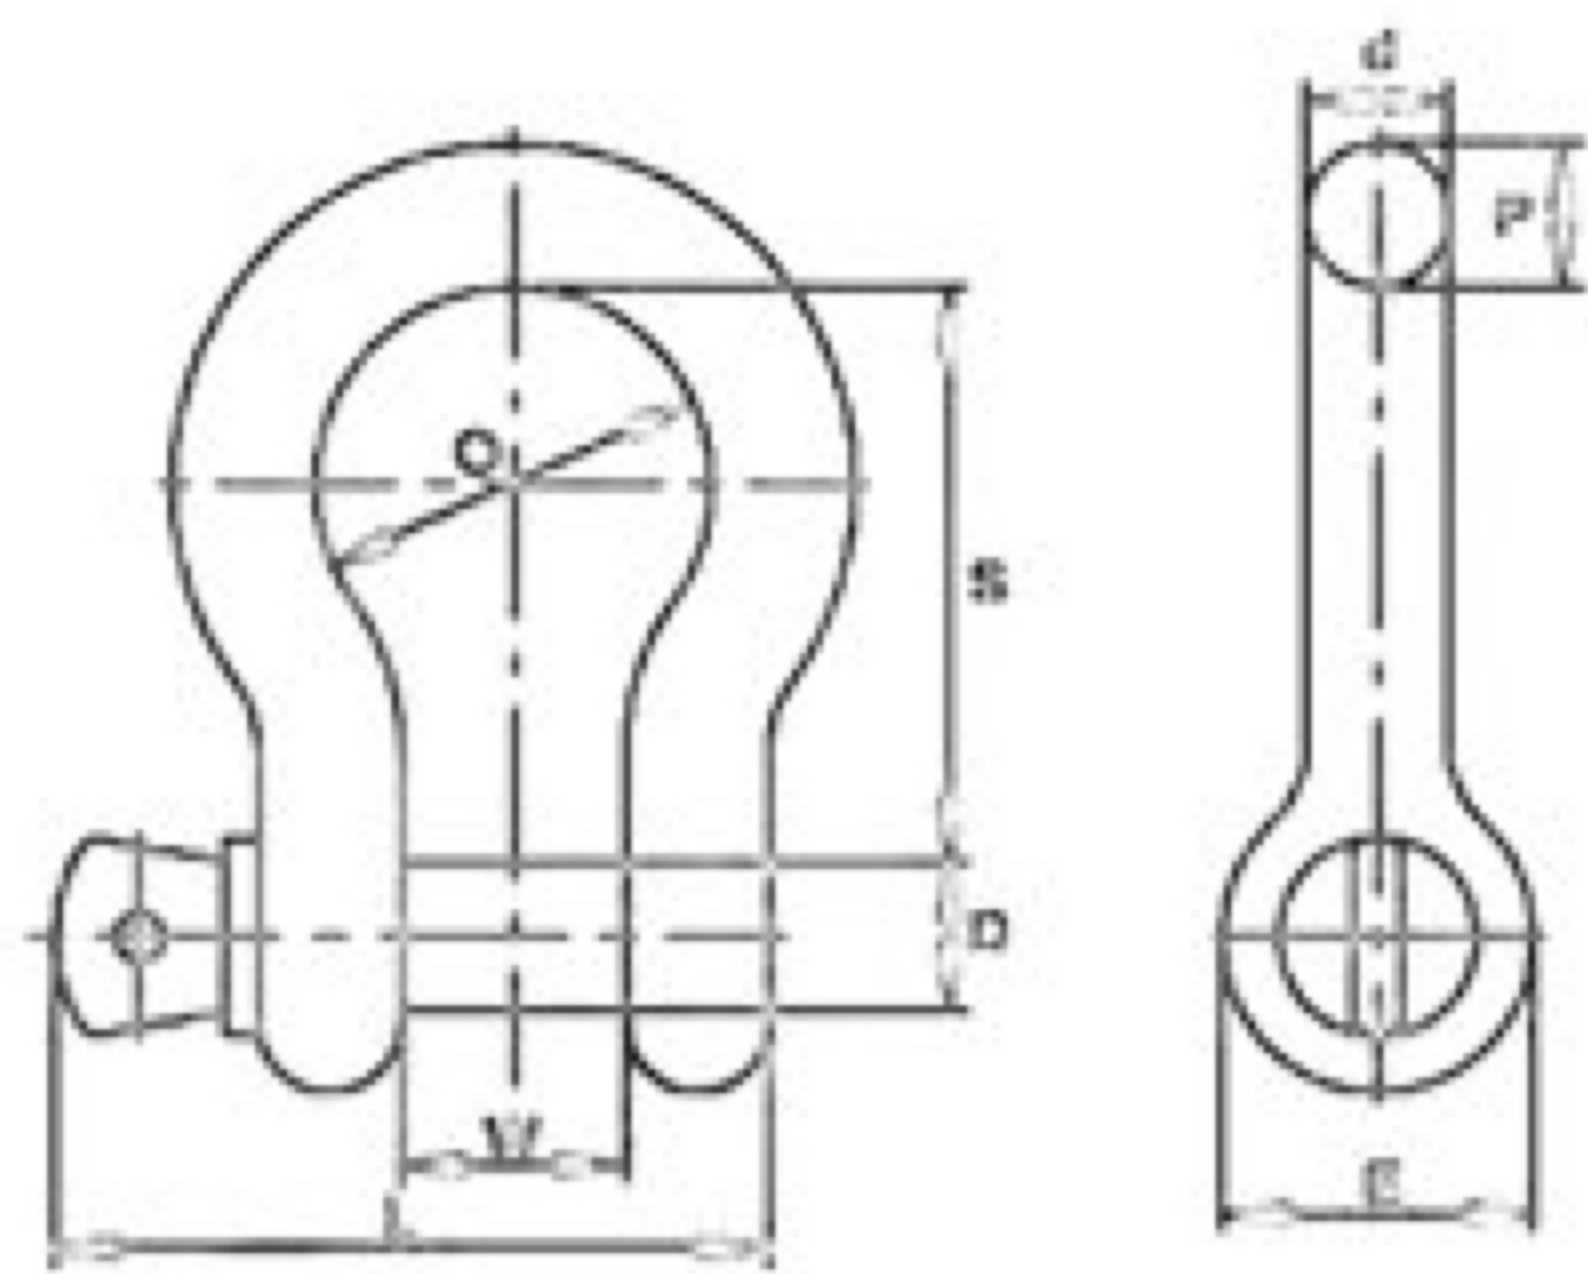

Model	Wll(t)	W(mm)	D(mm)	d(mm)	E(mm)	P(mm)	S(mm)	O(mm)	L(BW)(mm)	Self weight(BW)(Kg)
T-BW2-3/8	2	17	12	9.5	23	9.5	36.5	26	52.5	0.13
T-BW2.5-7/16	2.5	19	14	11	27	11	43	29.5	62	0.21
T-BW3.25-1/2	3.25	20.5	16	13	30	13	48	33	70.5	0.3
T-BW5-5/8	5	27	20	16	38	17.5	60.5	43	88	0.64
T-BW7-3/4	7	32	22	19	46	20.5	71.5	51	102.5	1.09
T-BW9.5-7/8	9.5	36.5	27	22.5	53	24.5	84	58	121	1.7
T-BW12.5-1	12.5	43	30	25.5	60.5	27	95	68.5	139	2.5
T-BW15-1 1/8	15	46	33	29.5	68.5	32	108	74	154	3.79
T-BW18-1 1/4	18	51.5	36	33	76	35	119	82.5	170.5	4.89
T-BW21-1 3/8	21	57	39	36	84	38	133.5	92	186.5	7.04
T-BW30-1 1/2	30	60.5	42	39	92	41	146	98.5	201	8.35
T-BW40-1 3/4	40	73	52	47	106.5	57	178	127	244	13.72
T-BW50-2	50	82.5	60	53	122	61	197	146	275	20.33
T-BW80-2 1/2	80	105	72	69	144.5	79.5	267	184	346	40.92

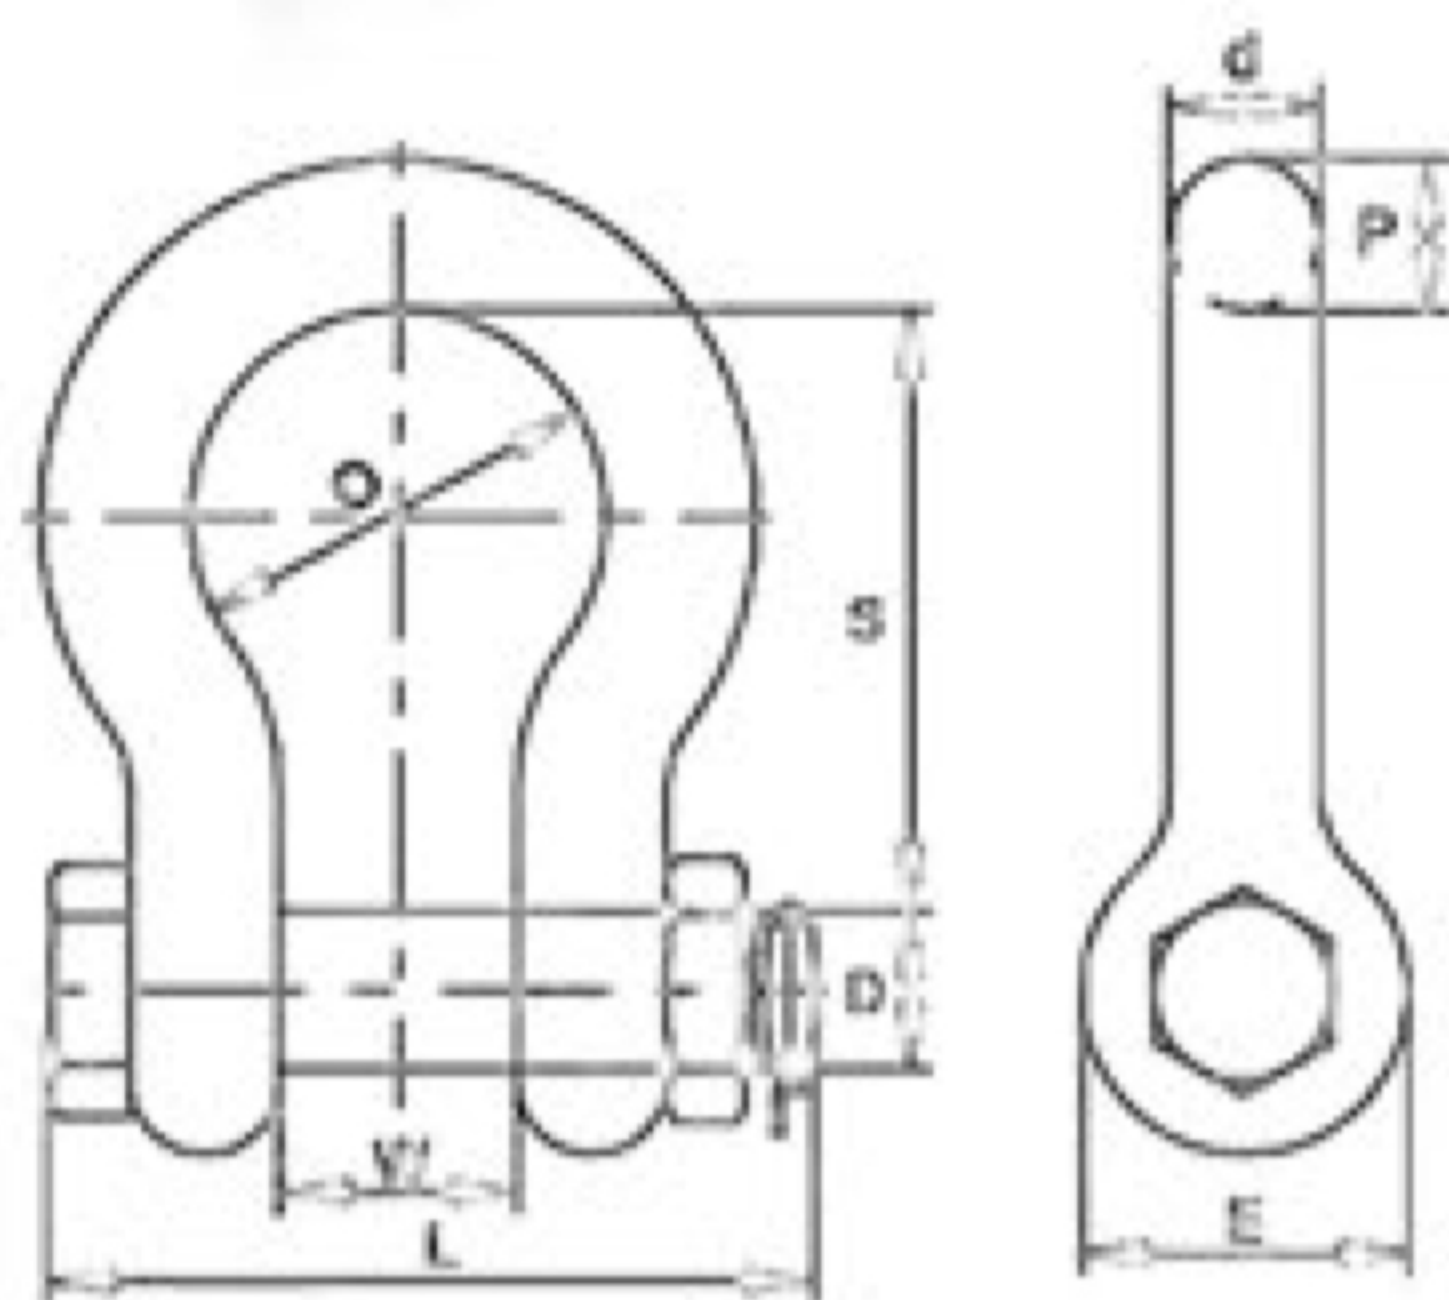

Model	WLL(t)	W(mm)	D(mm)	d(mm)	E(mm)	P(mm)	S(mm)	O(mm)	L(BX)(mm)	Self weight(BX)(kg)
T-BX2-3/8	2	17	12	9.5	23	9.5	36.5	26	54	0.13
T-BX2.5-7/16	2.5	19	14	11	27	11	43	29.5	62	0.22
T-BX3.25-1/2	3.25	20.5	16	13	30	13	48	33	71.5	0.31
T-BX5-5/8	5	27	20	16	38	17.5	60.5	43	89	0.67
T-BX7-3/4	7	32	22	19	46	20.5	71.5	51	105	1.14
T-BX9.5-7/8	9.5	36.5	27	22.5	53	24.5	84	58	121	1.76
T-BX12.5-1	12.5	43	30	25.5	60.5	27	95	68.5	136.5	2.58
T-BX15-1 1/8	15	46	33	29.5	68.5	32	108	74	150.5	3.96
T-BX18-1 1/4	18	51.5	36	33	76	35	119	82.5	166.5	5.06
T-BX21-1 3/8	21	57	39	36	84	38	133.5	92	181	7.29
T-BX30-1 1/2	30	60.5	42	39	92	41	146	98.5	196.5	8.75
T-BX40-1 3/4	40	73	52	47	106.5	57	178	127	239	14.22
T-BX50-2	50	82.5	60	53	122	61	197	146	269	21
T-BX80-2 1/2	80	105	72	69	144.5	79.5	267	184	344	42.12
T-BX110-3	110	127	85	76	165	92	330	200	401	74.8
T-BX140-3 1/2	140	133.5	95	92	203	104.5	371.5	228.5	450	123.6
T-BX175-4	175	140	110	104	228.5	116	368	254	500	165.9